


SureWood Plank and Tile

Features

- **FloorScore** certified
- Patented 5G Uniclic® Joint is strongest on the market, and proven to effectively reduce the chances of gapping
- Painted bevels add to a more realistic appearance. Made to closely resemble grout line on tiles
- Built-in antimicrobial cork underlayment has superior sound absorption and thermal insulation properties
- Wear layer is enhanced with Armor Care technology, making it exceptionally stain and scratch resistant

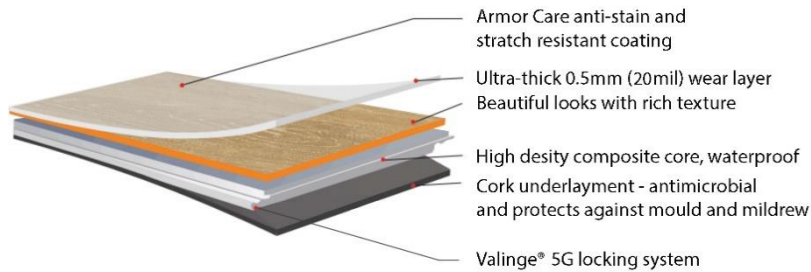

Product Information

Product Line	SureWood Luxury Vinyl Flooring
Construction	WPC (wood plastic composite) vinyl, includes 1.5mm antimicrobial cork underlayment
Dimension	Plank: 8mm x 180mm x 1220mm Tile: 8mm x 305mm x 610mm
Wear Layer Thickness	0.5mm (20mil)
Material	Completely recyclable
Warranty	30 Year Residential and 12 Year Commercial Warranty
Installation	Please refer to Installation Instruction, Care and Maintenance

Essential Characteristics

Characteristics	Test Method	Requirement	Our products test result
Reaction to fire	EN13501-1	National requirement	Class B fl-s1
Content of pentachlorophenol	CEN/TR 14823	No content allowed	No content
Slip resistance	DIN 51130	R10	R10
Electrical behaviour	EN 1815	< 2.0 kV (Antistatic)	< 2.0 kV
Formaldehyde Emission		Not Detected	EN717-1
Migration of heavy metals		Not Detected	EN717-1

Classification Requirements

Characteristic	Test Method	Requirement	Our products test result
Abrasion resistance	EN 13329 Annex E	>6000 (IP)	>6000(IP)
Resistance to staining	EN 438	5(group 1&2) 4(group 3)	5(group 1&2) 4(group 3)
Effect of a furniture leg	EN 424	No damage shall be visible, when tested with foot type 0	No change or damage
Effect of castor chair	EN 425	No change in appearance or damage, as defined in EN12529	No change or damage
Resistance to staining	EN 423	Index 0: Not effected	Not Effected
Color fastness	EN ISO 105B02	Blue wool scale ≥6	Blue wool scale ≥6
Color fastness	EN ISO 20105A02	Grey scale ≥4	Grey scale ≥4
Impact Sound Insulation	ISO 10140-3	10 dB	9 dB

SureWood Plank and Tile

Physical Statistics	Result	Method
Dimensional Stability to Heat	≤0.12%(80C,6Hrs)	EN434
Curling After Exposure to Heat	≤1.2mm(80C,6Hrs)	EN434
Wear Resistance	≤0.015g	EN-660-2
Peel Resistance	≥2.8kgf/2cm	EN431
Residual Indentation After Static Loading	≤0.1mm	EN434
Flexibility	No Damage	EN435

Packaging Information					
	Length (mm)	Width (mm)	Thickness (mm)	Sq. ft. per Carton	Weight (lb. per carton)
Plank	1220	180	8		
Tile	610	305	8		
Plank Carton	1232	191	70	19	31
Tile Carton	615	310	80	20	32.5

Pallet Information							
	Length (mm)	Width (mm)	Height (mm)	Volume (m ³)	# of carton per Pallet	Sq. ft. /pallet	Weight (lb.)
Plank Pallet	1245	965	991	1.19	70	1330	2170
Tile Pallet	1225	920	1060	1.19	72	1440	2340